


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm		
NAME:	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191114A10
MFR.: BRANDO TECHNOLOGY CO.,LTD	SUR.:0.014*0.97	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.66 lm/W			
MODEL	17W-SL10-230V	I _{max} (cd)	470.0	S/MH(C0/180)	1.33
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	AC220	TOTAL FLUX(lm)	1669.5	η UP,DN(C0-180)	5.5,43.9
NOMINAL FLUX(lm)	1669.52	CIE CLASS	SEMI-D.	η UP,DN(C180-360)	5.5,45.1
LAMPS INSIDE	1	η up(%)	11.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)		η down(%)	89.0	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

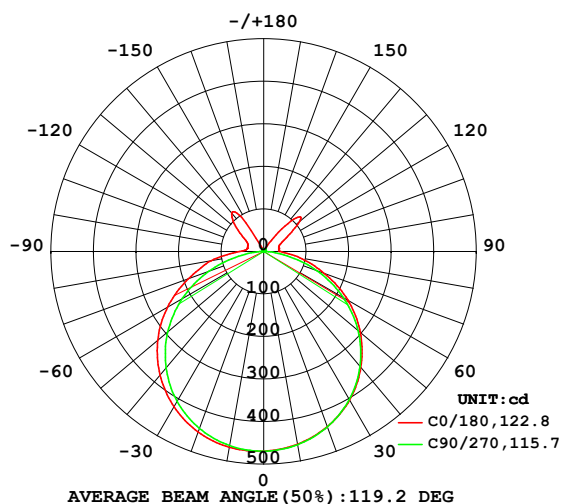

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

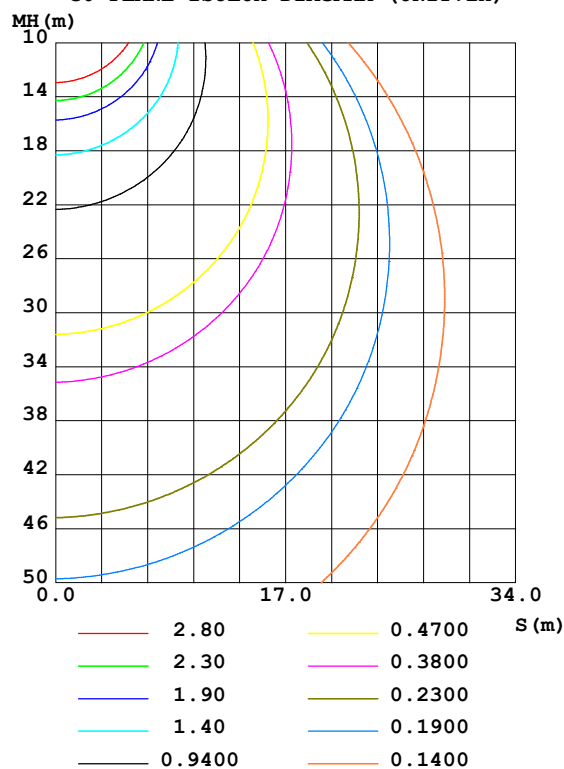

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:HUA
 Test Date:2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:8.383m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	459.8	459.7	461.3	464.4	467.3	466.0	463.4	461.1	0- 10	44.50	44.50	2.67,2.67
20	438.1	436.8	438.6	446.4	451.5	449.5	442.5	439.3	10- 20	128.4	172.9	10.4,10.4
30	403.8	401.5	402.2	413.6	421.8	418.5	407.2	405.0	20- 30	197.2	370.1	22.2,22.2
40	355.6	354.0	352.4	368.3	379.2	374.2	356.8	357.7	30- 40	242.4	612.5	36.7,36.7
50	296.9	293.9	290.1	311.2	325.0	317.6	294.5	297.1	40- 50	257.9	870.4	52.1,52.1
60	228.5	223.3	215.6	243.4	260.7	249.5	220.8	225.3	50- 60	241.1	1111	66.6,66.6
70	151.8	144.1	133.4	166.5	188.6	172.6	138.4	145.8	60- 70	193.2	1305	78.1,78.1
80	87.01	71.45	49.36	95.60	125.9	99.33	52.56	72.63	70- 80	124.1	1429	85.6,85.6
90	38.19	30.34	1.745	38.70	56.51	41.33	1.825	30.38	80- 90	57.03	1486	89,89
100	35.96	29.20	2.371	32.19	39.63	31.59	2.296	28.46	90-100	29.56	1515	90.8,90.8
110	38.96	28.73	3.135	33.21	40.02	32.06	3.009	28.69	100-110	27.80	1543	92.4,92.4
120	56.86	38.39	3.887	43.36	46.59	40.63	3.739	42.50	110-120	29.56	1573	94.2,94.2
130	111.2	59.81	4.645	74.45	80.27	70.43	4.502	53.37	120-130	38.28	1611	96.5,96.5
140	78.23	10.60	5.408	51.06	117.5	56.55	5.281	8.332	130-140	38.71	1650	98.8,98.8
150	9.813	6.169	6.093	6.135	36.10	6.142	5.995	6.108	140-150	16.50	1666	99.8,99.8
160	6.699	6.678	6.658	6.621	6.627	6.584	6.570	6.594	150-160	3.159	1669	100,100
170	0	0	0	0	0	0	0	0	160-170	0.1212	1670	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1670	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 741.51 lm

%lum = 44.4%

%lamp = 44.4%

Conical surface Flux(120deg): 1111.5 lm

%lum = 66.6%


%lamp = 66.6%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:HUA
 Test Date:2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:8.383m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm		
NAME:	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191114A10
MFR.: BRANDO TECHNOLOGY CO.,LTD	SUR.:0.014*0.97	Shielding Angle:

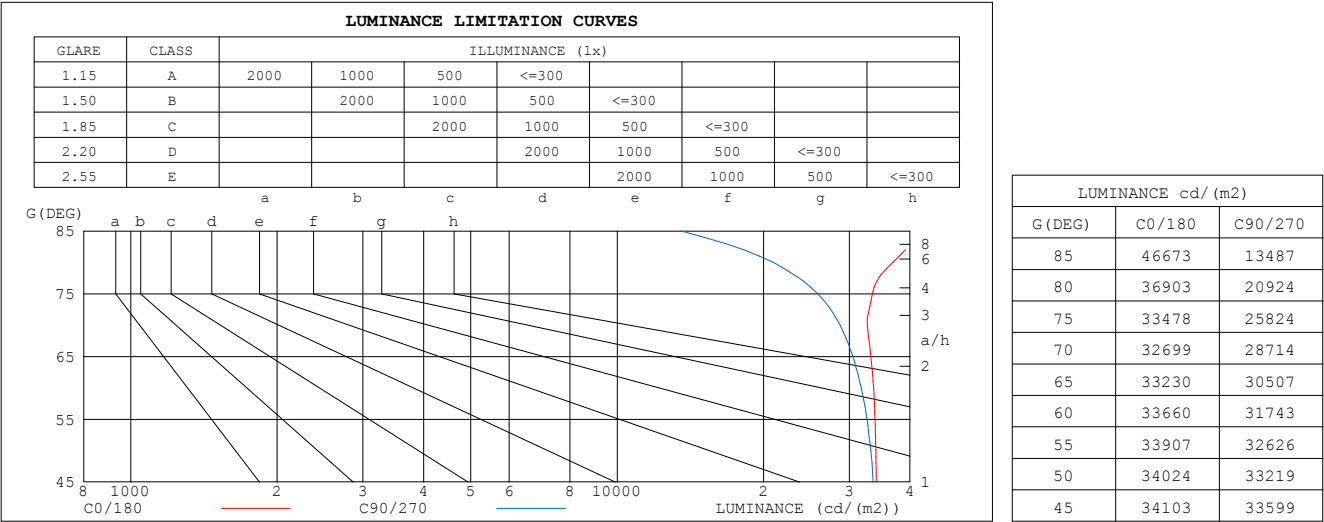


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:HUA
Test Date:2019-11-14

γ Range: 0 - 160DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:8.383m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm		
NAME:	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191114A10
MFR.: BRANDO TECHNOLOGY CO.,LTD	SUR.:0.014*0.97	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.05	1.05	1.05	.98	.98	.98	.92	.92	.92	.89
1.0	1.00	.96	.91	.97	.93	.89	.90	.87	.84	.85	.82	.80	.79	.77	.75	.72
2.0	.87	.80	.74	.84	.77	.72	.78	.73	.68	.74	.69	.65	.69	.65	.62	.59
3.0	.76	.67	.61	.73	.66	.59	.69	.62	.57	.64	.59	.55	.61	.56	.52	.50
4.0	.67	.58	.51	.65	.56	.50	.61	.54	.48	.57	.51	.46	.54	.49	.45	.42
5.0	.59	.50	.44	.58	.49	.43	.54	.47	.41	.51	.45	.40	.48	.43	.38	.36
6.0	.53	.44	.38	.52	.43	.37	.49	.41	.36	.46	.40	.35	.44	.38	.34	.31
7.0	.48	.39	.33	.47	.39	.33	.44	.37	.32	.42	.36	.31	.40	.34	.30	.28
8.0	.44	.35	.29	.43	.35	.29	.40	.33	.28	.38	.32	.27	.36	.31	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.35	.29	.25	.34	.28	.24	.22
10.0	.37	.29	.24	.36	.29	.23	.34	.28	.23	.33	.27	.22	.31	.26	.22	.20

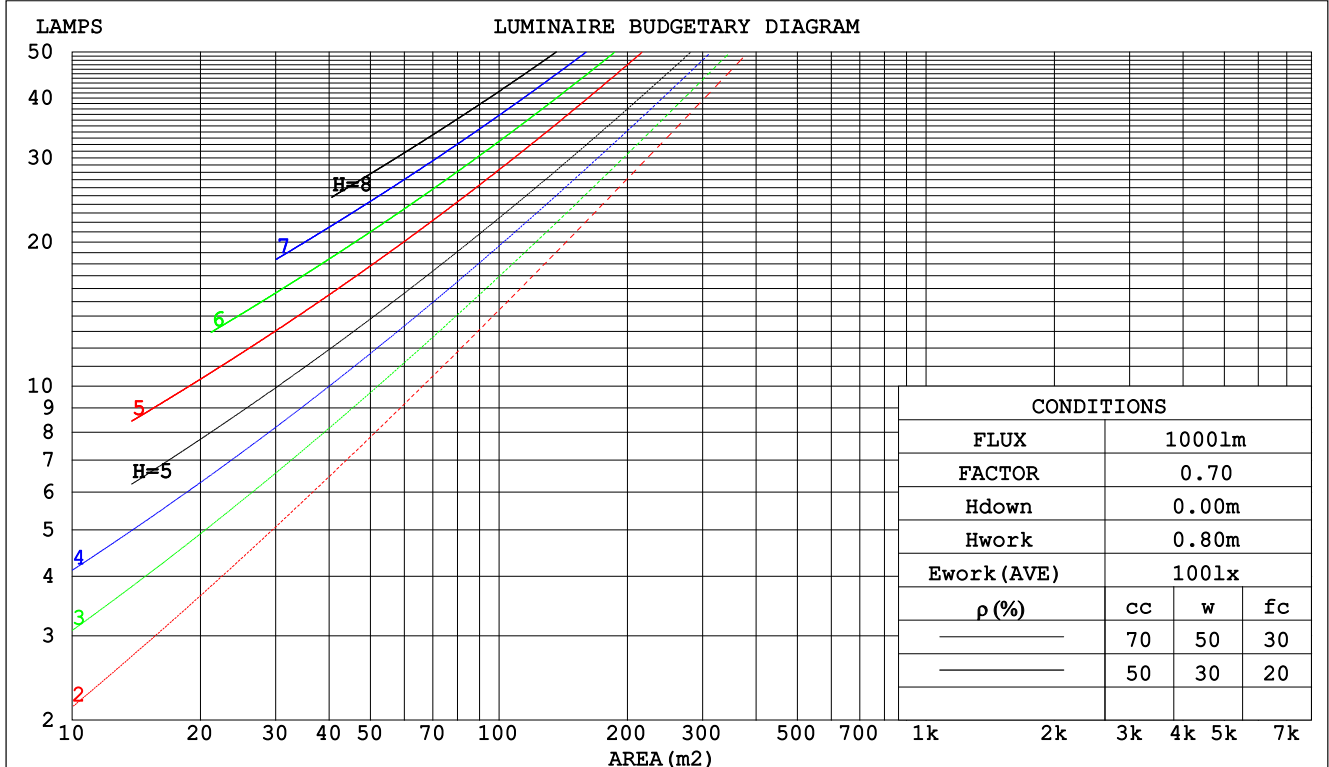

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:HUA
 Test Date:2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:8.383m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm					
NAME:			TYPE:LED		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:BLD20191114A10
MFR.: BRANDO TECHNOLOGY CO.,LTD			SUR.:0.014*0.97		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.331	.188	.060	.320	.183	.058	.301	.172	.055	.283	.163	.052	.266	.154	.050		
2.0	.302	.166	.051	.293	.161	.050	.276	.153	.048	.259	.145	.046	.244	.138	.044		
3.0	.276	.147	.044	.268	.143	.043	.252	.137	.042	.237	.130	.040	.224	.124	.038		
4.0	.253	.131	.039	.245	.128	.038	.231	.123	.037	.218	.117	.035	.206	.112	.034		
5.0	.233	.119	.034	.226	.116	.034	.213	.111	.033	.201	.106	.032	.190	.101	.030		
6.0	.215	.108	.031	.209	.105	.030	.197	.101	.029	.186	.097	.028	.176	.093	.028		
7.0	.199	.099	.028	.194	.097	.028	.183	.093	.027	.173	.089	.026	.164	.085	.025		
8.0	.186	.091	.026	.181	.089	.025	.171	.085	.024	.162	.082	.024	.153	.079	.023		
9.0	.174	.084	.023	.169	.082	.023	.160	.079	.022	.152	.076	.022	.144	.073	.021		
10.0	.163	.078	.022	.159	.077	.021	.151	.074	.021	.143	.071	.020	.136	.068	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients (CCEC)												
0.0	.274	.274	.274	.234	.234	.234	.160	.160	.160	.092	.092	.092	.029	.029	.029	
1.0	.266	.240	.217	.228	.206	.187	.156	.142	.129	.090	.082	.075	.029	.026	.024	
2.0	.259	.217	.182	.222	.187	.157	.152	.129	.110	.088	.075	.064	.028	.024	.021	
3.0	.251	.200	.159	.215	.172	.138	.148	.120	.097	.085	.070	.057	.027	.023	.019	
4.0	.244	.187	.144	.209	.162	.125	.144	.113	.088	.083	.066	.052	.027	.021	.017	
5.0	.236	.177	.133	.203	.153	.116	.140	.107	.082	.081	.063	.048	.026	.020	.016	
6.0	.229	.169	.125	.197	.146	.109	.136	.102	.077	.079	.060	.046	.025	.020	.015	
7.0	.222	.162	.120	.191	.140	.104	.132	.098	.074	.077	.058	.044	.025	.019	.015	
8.0	.216	.156	.116	.186	.136	.101	.129	.095	.071	.075	.056	.043	.024	.018	.014	
9.0	.210	.152	.112	.181	.132	.098	.125	.092	.070	.073	.055	.041	.024	.018	.014	
10.0	.204	.147	.110	.176	.128	.096	.122	.090	.068	.071	.053	.041	.023	.017	.013	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:HUA
 Test Date:2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:8.383m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm											
NAME:					TYPE:LED			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:BLD20191114A10			
MFR.: BRANDO TECHNOLOGY CO.,LTD					SUR.:0.014*0.97			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		24.4	25.8	24.9	26.2	26.7	24.2	25.6	24.6	26.0	26.4
	3H	26.1	27.4	26.6	27.8	28.3	25.7	27.0	26.2	27.4	27.9
	4H	26.9	28.1	27.3	28.5	29.0	26.3	27.5	26.7	27.9	28.4
	6H	27.6	28.7	28.1	29.2	29.7	26.6	27.8	27.1	28.2	28.7
	8H	27.9	29.0	28.4	29.5	30.0	26.7	27.8	27.2	28.3	28.8
	12H	28.2	29.3	28.7	29.8	30.3	26.7	27.8	27.2	28.3	28.8
4H	2H	25.0	26.2	25.5	26.7	27.2	24.8	26.1	25.3	26.5	27.0
	3H	26.9	27.9	27.4	28.4	29.0	26.5	27.6	27.0	28.1	28.6
	4H	27.8	28.8	28.3	29.3	29.8	27.2	28.2	27.7	28.7	29.3
	6H	28.7	29.5	29.2	30.1	30.7	27.7	28.5	28.2	29.1	29.7
	8H	29.1	29.9	29.6	30.4	31.0	27.8	28.6	28.4	29.2	29.8
	12H	29.5	30.2	30.1	30.8	31.4	27.9	28.6	28.4	29.2	29.8
8H	4H	28.0	28.8	28.6	29.4	30.0	27.5	28.3	28.1	28.9	29.5
	6H	29.1	29.8	29.7	30.4	31.0	28.2	28.8	28.8	29.4	30.1
	8H	29.7	30.3	30.3	30.9	31.5	28.4	29.0	29.0	29.6	30.3
	12H	30.2	30.7	30.9	31.4	32.1	28.5	29.0	29.2	29.7	30.4
12H	4H	28.0	28.8	28.6	29.3	30.0	27.6	28.3	28.1	28.9	29.5
	6H	29.2	29.8	29.8	30.4	31.0	28.3	28.9	28.9	29.5	30.2
	8H	29.8	30.3	30.4	30.9	31.6	28.6	29.1	29.2	29.7	30.4
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.1 / - 0.3					+ 0.2 / - 0.3				


CIE Pub.117, 1670 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 1.8$)
Area: 0.01358 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:HUA
Test Date:2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:8.383m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm		
NAME:	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191114A10
MFR.: BRANDO TECHNOLOGY CO.,LTD	SUR.:0.014*0.97	Shielding Angle:

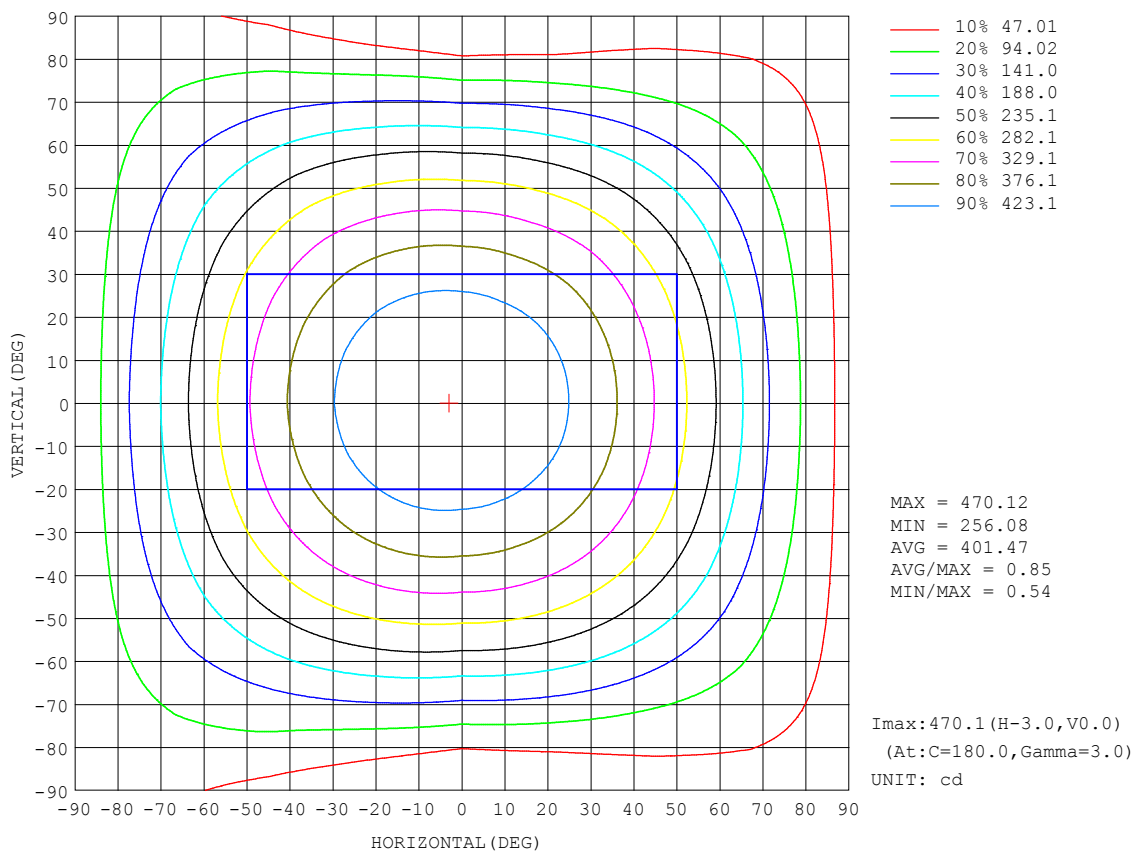


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: HUA
 Test Date: 2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 65.0%
 Test Distance: 8.383m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm		
NAME:	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191114A10
MFR.: BRANDO TECHNOLOGY CO.,LTD	SUR.:0.014*0.97	Shielding Angle:

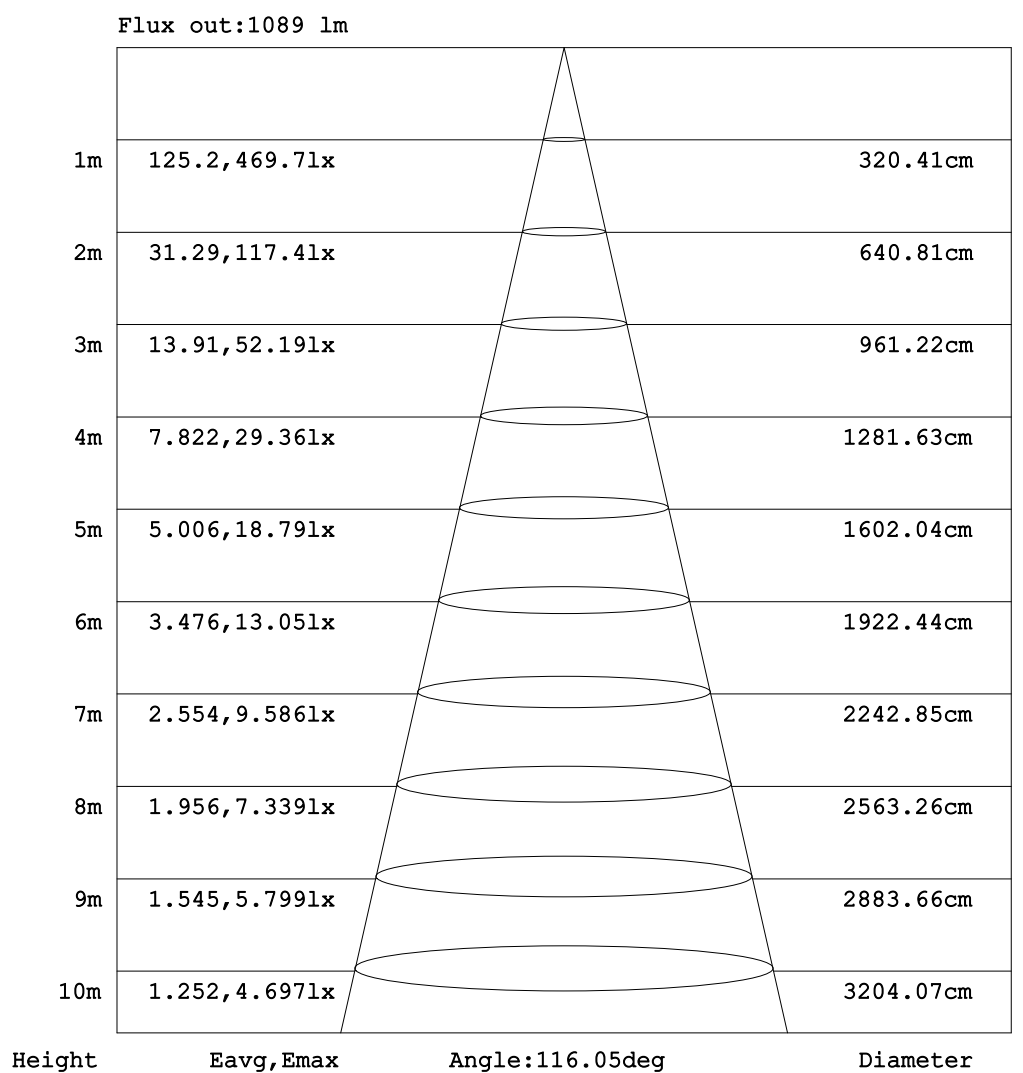


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:HUA
 Test Date:2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:8.383m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm		
NAME:	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191114A10
MFR.: BRANDO TECHNOLOGY CO.,LTD	SUR.:0.014*0.97	Shielding Angle:

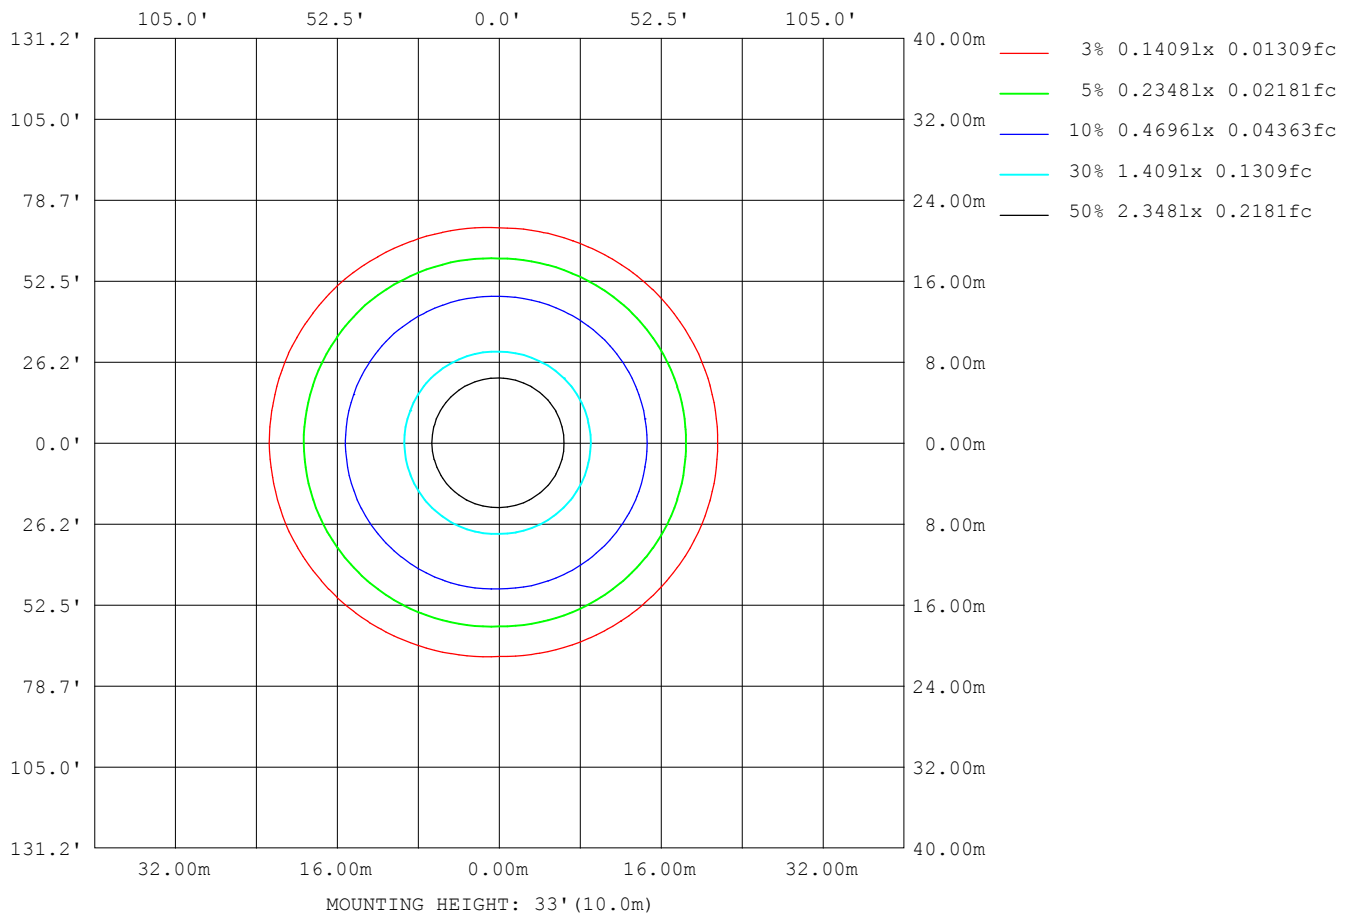

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:HUA
 Test Date:2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:8.383m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm		
NAME:	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191114A10
MFR.: BRANDO TECHNOLOGY CO.,LTD	SUR.:0.014*0.97	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	36229
L_0~180 (75) av	38637
L_0~180 (85) av	59996
L_90~270 (65) av	31003
L_90~270 (75) av	26363
L_90~270 (85) av	14352
L_45 (65) av	34352
L_45 (75) av	33540
L_45 (85) av	45912

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:HUA
 Test Date:2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:8.383m [K=1.0000]
 Remarks:

Planar Illuminance Curve

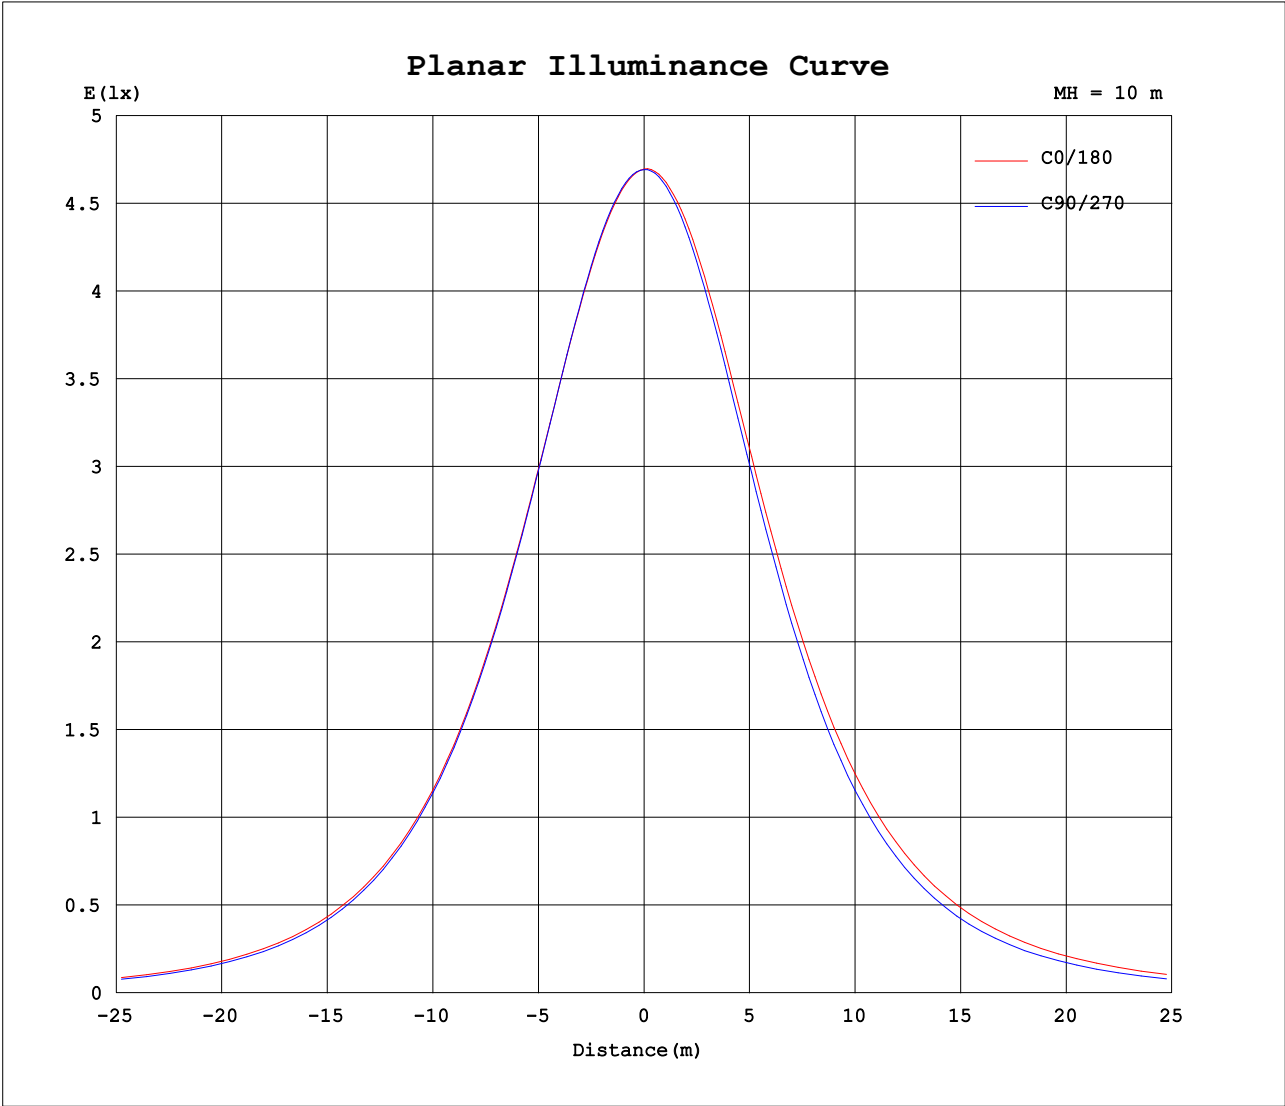

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:HUA
Test Date:2019-11-14

γ Range: 0 - 160DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:8.383m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.52V I:0.0782A P:16.263W PF:0.9423 Freq:50.00Hz Lamp Flux:1669.52x1 lm		
NAME:	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191114A10
MFR.: BRANDO TECHNOLOGY CO.,LTD	SUR.:0.014*0.97	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	469	469	469	469	469	469	469	469	469	469	469	469	469	469	469	469			
5	466	466	466	467	467	468	469	469	470	470	469	469	468	467	467	466			
10	460	460	460	460	461	463	464	466	467	467	466	465	463	462	461	461			
15	450	450	450	450	452	454	457	460	461	461	459	457	455	453	452	451			
20	438	438	437	437	439	442	446	450	452	451	450	446	442	440	439	439			
25	422	422	421	420	422	427	432	436	438	438	435	431	427	424	424	423			
30	404	403	401	401	402	408	414	419	422	421	418	413	407	404	405	405			
35	381	381	379	378	379	386	393	398	402	401	398	391	384	381	383	383			
40	356	355	354	352	352	361	368	375	379	379	374	365	357	355	358	357			
45	327	327	325	323	323	332	341	349	353	352	347	336	327	326	329	328			
50	297	296	294	292	290	301	311	320	325	324	318	305	295	294	297	298			
55	264	263	260	257	254	266	279	289	294	292	285	270	259	258	262	264			
60	229	228	223	219	216	229	243	255	261	258	249	233	221	221	225	229			
65	191	190	185	180	175	190	206	219	225	222	212	195	181	181	186	190			
70	152	151	144	138	133	149	166	182	189	185	173	154	138	140	146	151			
75	118	115	105	97.1	90.8	108	128	146	154	148	133	113	94.5	98.2	106	115			
80	87.0	83.1	71.4	58.4	49.4	70.0	95.6	118	126	119	99.3	73.3	52.6	58.4	72.6	83.4			
85	55.2	53.3	44.0	29.5	16.0	38.4	62.2	79.9	86.8	81.8	66.1	40.8	18.0	30.1	45.1	52.8			
90	38.2	36.8	30.3	17.2	1.75	20.4	38.7	51.4	56.5	53.0	41.3	21.5	1.83	17.0	30.4	36.4			
95	35.9	34.7	28.9	16.6	2.02	18.1	32.4	40.5	42.9	40.5	32.5	18.0	2.01	16.1	28.4	34.2			
100	36.0	34.9	29.2	16.7	2.37	18.5	32.2	38.4	39.6	37.9	31.6	18.3	2.30	16.1	28.5	34.2			
105	36.8	35.6	29.2	16.8	2.75	18.7	32.5	38.4	39.5	37.7	31.6	18.3	2.63	16.2	27.5	35.0			
110	39.0	36.7	28.7	17.2	3.14	19.5	33.2	38.9	40.0	38.1	32.1	18.9	3.01	16.3	28.7	37.1			
115	44.3	40.2	31.9	17.1	3.51	21.9	36.1	40.7	41.6	39.7	34.3	21.1	3.37	17.2	32.7	42.5			
120	56.9	52.6	38.4	19.1	3.89	26.1	43.4	46.8	46.6	45.2	40.6	25.4	3.74	18.2	42.5	53.4			
125	79.9	77.3	56.7	5.35	4.26	15.3	58.0	59.8	58.8	57.6	53.6	17.8	4.13	4.50	54.7	72.6			
130	111	92.1	59.8	4.73	4.64	5.08	74.5	81.1	80.3	78.8	70.4	5.07	4.50	4.62	53.4	85.3			
135	115	82.4	32.7	5.10	5.04	5.07	85.2	100	102	97.6	80.7	4.99	4.89	4.98	26.8	71.9			
140	78.2	45.2	10.6	5.47	5.41	5.43	51.1	111	117	109	56.6	5.36	5.28	5.33	8.33	36.7			
145	34.6	19.7	5.92	5.80	5.78	5.76	7.82	92.7	111	94.1	8.04	5.70	5.65	5.68	5.86	15.7			
150	9.81	6.53	6.17	6.13	6.09	6.09	6.13	16.1	36.1	13.7	6.14	6.01	6.00	6.01	6.11	6.37			
155	6.46	6.47	6.45	6.41	6.40	6.38	6.38	6.30	6.49	6.37	6.38	6.28	6.30	6.31	6.36	6.46			
160	6.70	6.68	6.68	6.68	6.66	6.62	6.62	6.52	6.63	6.60	6.58	6.54	6.57	6.59	6.59	6.65			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:HUA
Test Date:2019-11-14

γ Range: 0 - 160DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:8.383m [K=1.0000]
Remarks: